

**5000**  
Units Only  
(Worldwide)

## 50th Anniversary Limited Edition with New Features



### DIGITAL

#### DV Fast Data Mode\*

By using data in place of voice frames, the ID-51E transfers data three times faster than in the DV mode. Pictures taken by an Android™ device can be quickly transmitted in the DV Fast Data mode.

\* The DV Fast Data mode is not compatible with the low-speed data communication mode.

Conventional low-speed data mode

950bps


DV Fast Data Mode

3480bps

#### RS-MS1A, Free Download Android™ Application

The RS-MS1A allows you to connect your Android™ device to the ID-51E\*. You can see the location of repeater sites on a map application and set them to the ID-51E. Text messages and pictures can be sent and received with your Android™ device.

\* The optional OPC-2350LU data cable is required to connect to an Android™ device.



#### DV and FM Repeater Search Function

The repeater search function searches for nearby analog FM repeaters as well as DV repeaters using the repeater memories and the integrated GPS\*.

\* To use the repeater search function, the position data of the repeater is required.

#### Additional Dplus Reflector Link Commands

Dplus reflector link commands are added to the DR function to allow easy multiple repeater connection through the reflector.

#### Both Long Antenna and Standard Antenna Supplied

In addition to the standard antenna, a long antenna is supplied with the ID-51E. The long antenna is optimal for wideband reception including AM/FM broadcast stations.

Long antenna (Left), Standard antenna (Right)




#### Other New and Enhanced Functions (Compared to the ID-51E)

- Increased repeater groups from 25 to 30
- No gateway icon appears when the repeater does not connect to the gateway.
- GPS position data can be sent in the low-speed data communication mode
- Enhanced D-PRS functions with Base/Object/Item/Weather formats
- Altitude data added to the GPS memories
- CI-V commands added for new functions
- Callsign, repeater list and GPS memory import and export in the CSV format

**Features retained from the ID-51E**

**V/V, U/U, V/U Dualwatch**

The dualwatch function simultaneously monitors VHF/VHF, UHF/UHF and VHF/UHF bands.\*



V/V, U/U dualwatch

\* DV/DV, AM/AM, FM-N/FM-N and DV/FM-N mode dualwatch is not available.

**IPX7 Waterproof Construction**

The ID-51E has superior IPX7 waterproof protection (1m depth of water for 30 minutes). It can be used in harsh outdoor environments, and for hiking, mountain biking, touring and mountain sports.



\* When used with the long antenna, the ID-51E has IPX3 water spray resistance.

**Independent AM/FM Receiver**

FM and AM broadcast stations can be listened to while using the dualwatch function to monitor the ham bands. When a ham band signal is received, the broadcast station is automatically muted.




AM + dualwatch receive

**microSD Card Slot**

When used with a microSD card (Up to 32GB), various contents including voice memory, DV auto reply message, TX voice message, QSO log, RX history log and GPS log data can be stored. The microSD card can also be used to update firmware and edit memories.

**Integrated GPS Receiver**

Your current position and altitude are shown on the display and offers a position reporting function in DV mode. The GPS log function logs your position information at regular intervals on the microSD card.

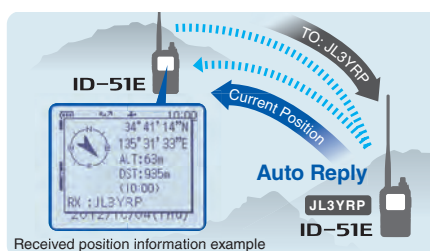

Received position information example

**Other Features**

- TX voice memory (1 channel, 60 seconds) for repeated calls
- SPEECH function announces the received call sign (DV Mode), frequency, and mode
- QSO recorder function records incoming and outgoing calls. The voice recorder function can record an off-line conversation.
- 128 x 104 dot large full dot-matrix display
- CSV formatted communication log
- DR (D-STAR repeater) function makes it easy to access D-STAR repeaters
- 10-step battery voltage indicator

**SPECIFICATIONS**

GENERAL			
Frequency coverage		(Unit: MHz)	
Version	Transmit	Receiver (working range)	Broadcast
ID-51E (EURO)	144-146, 430-440	A Band: 144-146, 430-440 B Band: 144-146, 430-440	0.52-1.710, 76-108
Type of emission		F2D, F3E, F7W	
Number of memory channels		1304 channels (including repeater, program scan edges and call channels)	
Operating Temp. range		-20°C to +60°C	
Frequency stability		±2.5ppm (on the basis of 25°C)	
Power supply requirement		7.4V DC (with BP-271, BP-272) 5.5V (with BP-273)	
Alkaline cells		10-16V DC	
External DC power		10-16V DC	
Current drain (at 7.4V DC)		Less than 2.5A	
Tx High		Less than 450mA/350mA (DV/FM)	
Rx Internal SP (16Ω)		Less than 300mA/200mA (DV/FM)	
External SP (8Ω)			
Antenna impedance		50Ω (SMA)	
Dimensions (W×H×D, projections not included)		58×105.4×26.4 mm	
Weight (approx.)		255g (with BP-271 & standard antenna)	
TRANSMITTER			
Modulation system DV, FM		GMSK reactance modulation, FM reactance modulation	
Output power (at 7.4V DC)		5W, 2.5W, 1.0W, 0.5W, 0.1W (High, Mid, Low2, Low1, S-low)	
Spurious emissions		Less than -60dBc (High, Mid), Less than -13dBm (Low2, Low1, S-low)	
Max. frequency deviation		±5.0/2.5kHz (FM/FM-N)	
Ext. Mic impedance		2.2kΩ	
RECEIVER			
Sensitivity DV, FM, FM-N		Less than 0.28μV (at 1% BER) Less than 0.18μV (at 12dB SINAD)	
Selectivity DV, FM-N, FM		More than 50dB More than 55dB	
Spurious rejection		More than 60dB	
Audio output power (at 7.4V DC, 10% distortion)		More than 400mW More than 200mW	
Internal SP (16Ω load)			
External SP (8Ω load)			
Applicable IP Rating			
Ingress Protection Standard (With battery pack and standard antenna)			
Water		IPX7 (Waterproof protection)	

**Supplied accessories** (\* Depending on version)

- Battery pack, BP-271
- Wall charger, BC-167SA/SD\*
- Standard antenna, FA-S270C
- Long antenna, FA-S270E
- Cloning software, CS-51PLUS
- Belt clip, MB-127
- Hand strap

**OPTIONS**

New options for ID-51E 50th anniversary limited edition are shown in red Italic.

**BATTERY PACKS AND CASE**

- BP-271: 7.4V/1150mAh (min.), 1200mAh (typ.) Li-Ion battery
- BP-272: 7.4V/1880mAh (min.), 2000mAh (typ.) Li-Ion battery
- BP-273: LR6 (AA) x 3 battery case

**BATTERY CHARGERS**

- BC-167SA/SD: Wall charger (12V/500mA output)
- BC-202: Rapid desktop charger. Charges the BP-271/272 in 2/3.5 hours (approx.).

**CIGARETTE LIGHTER AND DC POWER CABLE**

- CP-19R: Cigarette lighter cable with DC-DC converter
- CP-12L: Cigarette lighter cable with noise filter
- OPC-254L/LR: DC power cable

**SPEAKER-MICROPHONES AND EARPHONE**

- HM-75LS: Remote control speaker microphone
- HM-186LS: Compact type speaker microphone
- HM-153LS: Durable type earphone microphone
- HM-166LS: Light type earphone microphone
- SP-13: Earphone (OPC-2144 required)
- OPC-2144: Slim L-type plug adapter cable (Regular 2-pin connectors to slim L-type 2-pin connectors)

**HEADSETS**

- HS-94: Earphone-headset (OPC-2006LS required)
- HS-95: Behind-the-head headset (OPC-2006LS required)
- HS-97: Throat microphone (OPC-2006LS required)
- OPC-2006LS: VOX plug adapter cable

**Android™ APPLICATION AND DATA CABLE**

- RS-MS1A: Free download software from Google Play™
- OPC-2350LU: Data cable for Android™ device

**CLONING SOFTWARE AND DATA CABLE**

- CS-51PLUS: Cloning software
- OPC-2218LU: Data communication cable (USB type)

**OTHER OPTIONS**

- AD-92SMA: BNC-type antenna connector adapter
- CT-17: CI-V level converter
- FA-S270C: VHF/UHF standard antenna
- LC-179: Carrying case
- MB-127: Alligator type belt clip
- SJ-1: Silicon jacket case (For use with BP-271)

All stated features, appearances, screenshots and specifications are subject to change without notice or obligation. D-STAR (Digital Smart Technology for Amateur Radio) is a digital radio protocol developed by JARL (Japan Amateur Radio League). Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries. Android and Google Play are registered trademarks or trademarks of Google Inc. All other trademarks are the properties of their respective holders.

**Icom Inc.**

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

[www.icom.co.jp/world](http://www.icom.co.jp/world)

**Count on us!**

**Icom America Inc.**

12421 Willows Road NE, Kirkland, WA 98034, U.S.A.  
Phone: +1 (425) 454-8155  
Fax: +1 (425) 454-1509  
E-mail: [sales@icomamerica.com](mailto:sales@icomamerica.com)  
URL: <http://www.icomamerica.com>

**Icom (Europe) GmbH**

Communication Equipment, Auf der Krautweide 24, 65812 Bad Soden am Taunus, Germany  
Phone: +49 (6196) 76685-0  
Fax: +49 (6196) 76685-50  
E-mail: [info@icom-europe.com](mailto:info@icom-europe.com)  
URL: <http://www.icomeurope.com>

**Icom France s.a.s.**

Zac de la Plaine, 1 Rue Brindejonc des Moulinais, BP 45804, 31505 Toulouse Cedex 5, France  
Phone: +33 (5) 61 36 03 03  
Fax: +33 (5) 61 36 03 00  
E-mail: [icom@icom-france.com](mailto:icom@icom-france.com)  
URL: <http://www.icom-france.com>

**Asia Icom Inc.**

6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.  
Phone: +886 (02) 2559 1899  
Fax: +886 (02) 2559 1874  
E-mail: [sales@asia-icom.com](mailto:sales@asia-icom.com)  
URL: <http://www.asia-icom.com>

Your local distributor/dealer:

**Icom Canada**

Glenwood Centre #150-6165 Highway 17A, Delta, B.C., V4K 5B8, Canada  
Phone: +1 (604) 952-4266  
Fax: +1 (604) 952-0090  
E-mail: [info@icomcanada.com](mailto:info@icomcanada.com)  
URL: <http://www.icomcanada.com>

**Icom Spain S.L.**

Ctra. Rubi, No. 88 "Edificio Can Castanyer" Bajos A 08174, Sant Cugat del Valles, Barcelona, Spain  
Phone: +34 (93) 590 26 70  
Fax: +34 (93) 589 04 46  
E-mail: [icom@icomspain.com](mailto:icom@icomspain.com)  
URL: <http://www.icomspain.com>

**Icom (Australia) Pty. Ltd.**

Unit 1 / 103 Garden Road, Clayton, VIC 3168 Australia  
Phone: +61 (03) 9549 7500  
Fax: +61 (03) 9549 7505  
E-mail: [sales@icom.net.au](mailto:sales@icom.net.au)  
URL: <http://www.icom.net.au>

**Shanghai Icom Ltd.**

No.101, Building 9, Caifuxingyuan Park, No.188 Maoting Road, Chedun Town, Songjiang District, Shanghai, 201611, China  
Phone: +86 (021) 6153 2768  
Fax: +86 (021) 5765 9987  
E-mail: [bjicom@bjicom.com](mailto:bjicom@bjicom.com)  
URL: <http://www.bjicom.com>

**Icom Brazil**

Rua Itororó, 444 Padre Eustáquio Belo Horizonte MG, CEP: 30720-450, Brazil  
Phone: +55 (31) 3582 8847  
Fax: +55 (31) 3582 8987  
E-mail: [sales@icombrasil.com](mailto:sales@icombrasil.com)

**Icom (UK) Ltd.**

Blacksole House, Altira Park, Herne Bay, Kent, CT6 6GZ, U.K.  
Phone: +44 (0) 1227 741741  
Fax: +44 (0) 1227 741742  
E-mail: [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
URL: <http://www.icomuk.co.uk>

**Icom New Zealand**

39C Rennie Drive, Airport Oaks, Auckland, New Zealand  
Phone: +64 (09) 274 4062  
Fax: +64 (09) 274 4708  
E-mail: [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz)  
URL: <http://www.icom.co.nz>